

Deploying an End-to-End LoRaWAN Platform

Starting from September 2016, Saint-Joseph University of Beirut (USJ) will be deploying the first academic LoRa network in Lebanon. The network will support monitoring of micro-climate conditions in vineyards. Here below you can find a detailed description of the experimental platform implementing an end-to-end LoRaWAN solution.

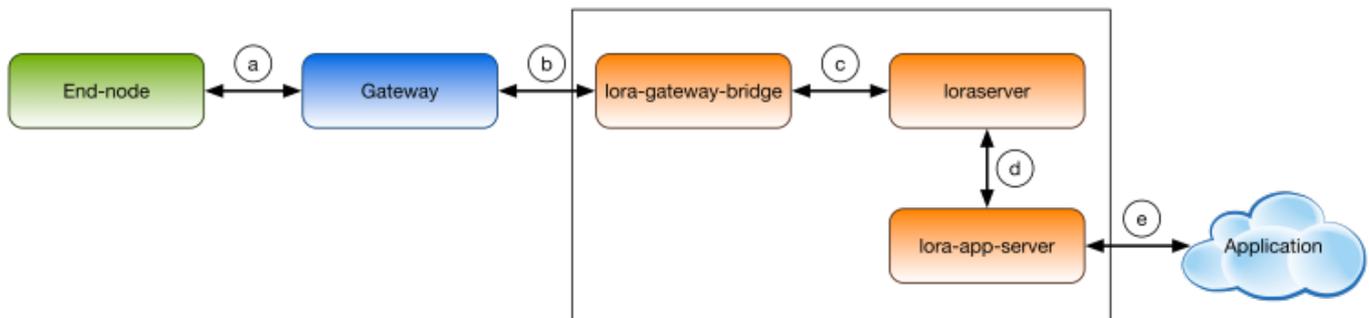


Figure 2. Architecture of the LoRaWAN Platform

- End-nodes

- Autonomo with LoRaBee

- Arduino with Dragino Shield

- Gateways

- Single Channel Gateway

The single channel gateway includes a LoRa transmission module (the Dragino Shield) connected to a Raspberry Pi (2 or 3). The connection pins are identified in Figures 2 and 3. Communication is done on an SPI communication interface.

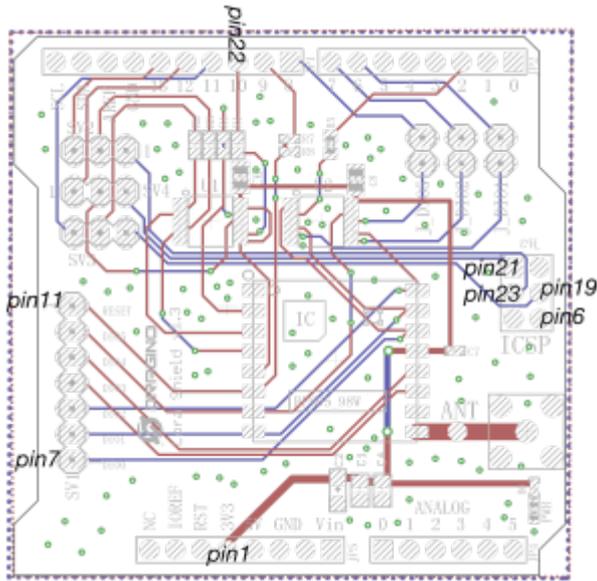


Figure 2. Dragino pin mapping

Raspberry Pi 3 GPIO Header

Pin#	NAME	NAME	Pin#
01	3.3v DC Power	DC Power 5v	02
03	GPIO02 (SDA1 , I ² C)	DC Power 5v	04
05	GPIO03 (SCL1 , I ² C)	Ground	06
07	GPIO04 (GPIO_GCLK)	(TXD0) GPIO14	08
09	Ground	(RXD0) GPIO15	10
11	GPIO17 (GPIO_GEN0)	(GPIO_GEN1) GPIO18	12
13	GPIO27 (GPIO_GEN2)	Ground	14
15	GPIO22 (GPIO_GEN3)	(GPIO_GEN4) GPIO23	16
17	3.3v DC Power	(GPIO_GEN5) GPIO24	18
19	GPIO10 (SPI_MOSI)	Ground	20
21	GPIO09 (SPI_MISO)	(GPIO_GEN6) GPIO25	22
23	GPIO11 (SPI_CLK)	(SPI_CE0_N) GPIO08	24
25	Ground	(SPI_CE1_N) GPIO07	26
27	ID_SD (I ² C ID EEPROM)	(I ² C ID EEPROM) ID_SC	28
29	GPIO05	Ground	30
31	GPIO06	GPIO12	32
33	GPIO13	Ground	34
35	GPIO19	GPIO16	36
37	GPIO26	GPIO20	38
39	Ground	GPIO21	40

Rev. 2
20/03/2016
www.element14.com/RaspberryPi

Figure 3. Raspberry pi 3 pins

- Kerlink IoT Station
- Backend
- Loraserver
- The Things Network
- Applications

- . **MQTT spy**

- . **Emoncms**

From:

<http://wiki.lahoud.fr/> - **wikiroute**

Permanent link:

http://wiki.lahoud.fr/doku.php?id=deploying_lorawan&rev=1482227733

Last update: **2016/12/20 10:55**

